




# Premium

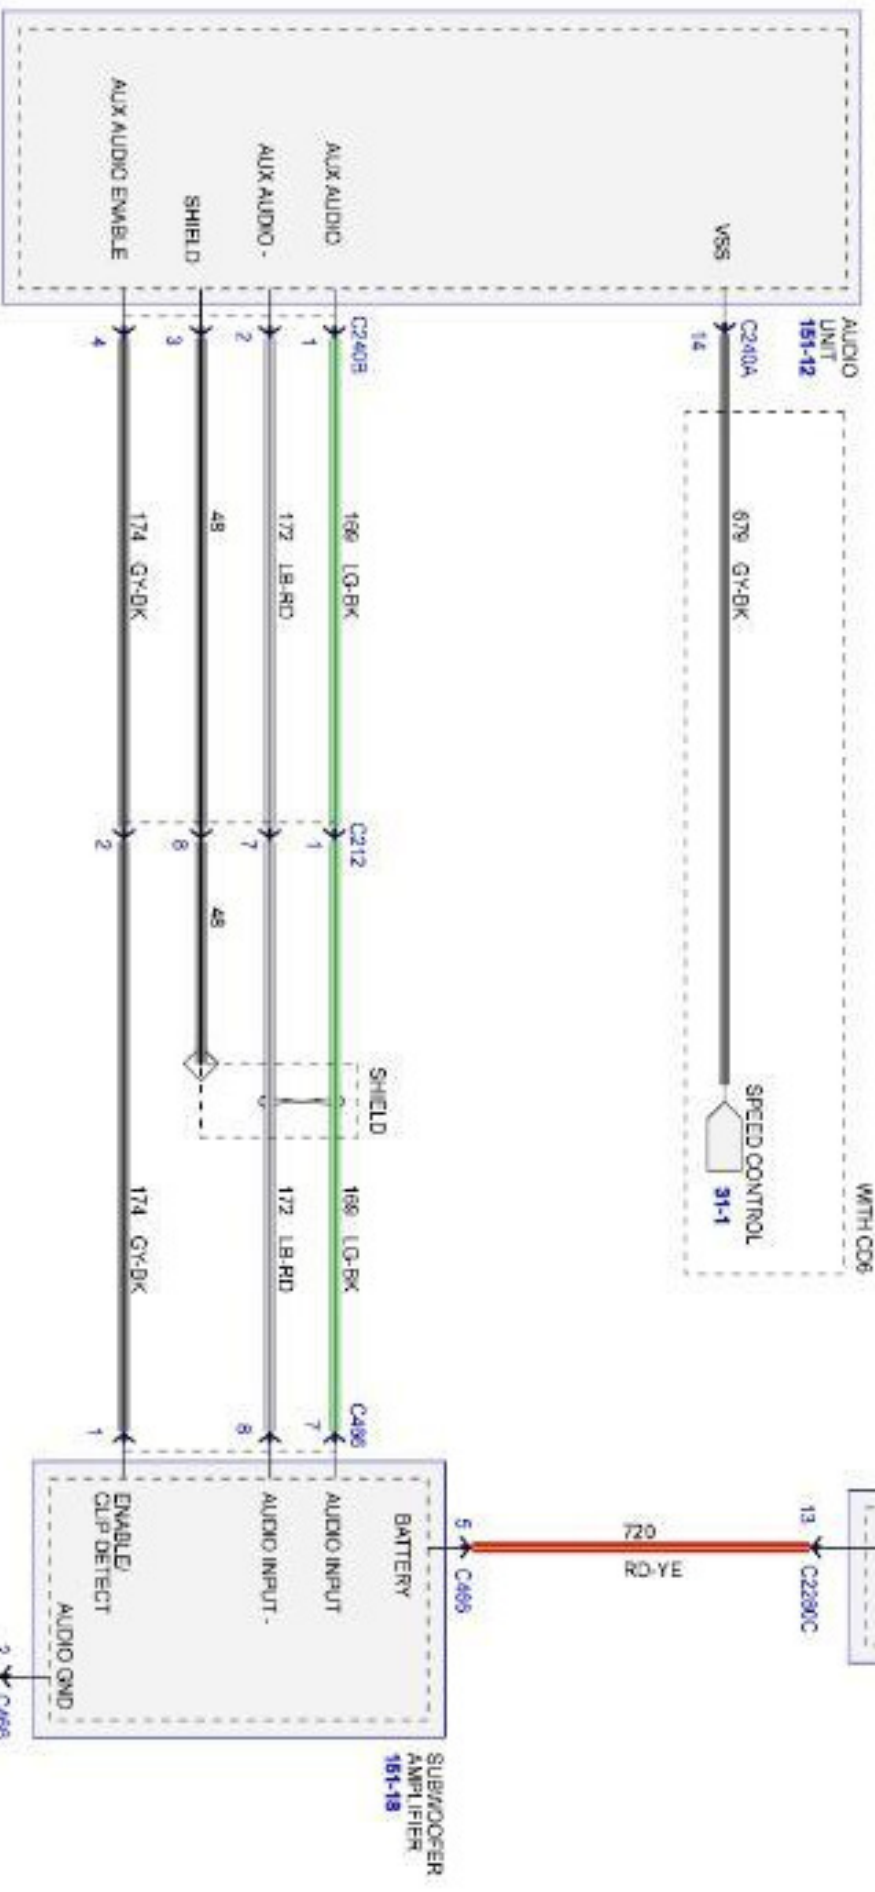

Hot at all times

SMART JUNCTION BOX (SUB) 11-5

SUPERCHARGER AMPLIFIER 151-18


GA04 10-B

# Connector: C240A

**Description:**  
AUDIO UNIT

**Harness:**  
14401

**Base Part #:**  
18808

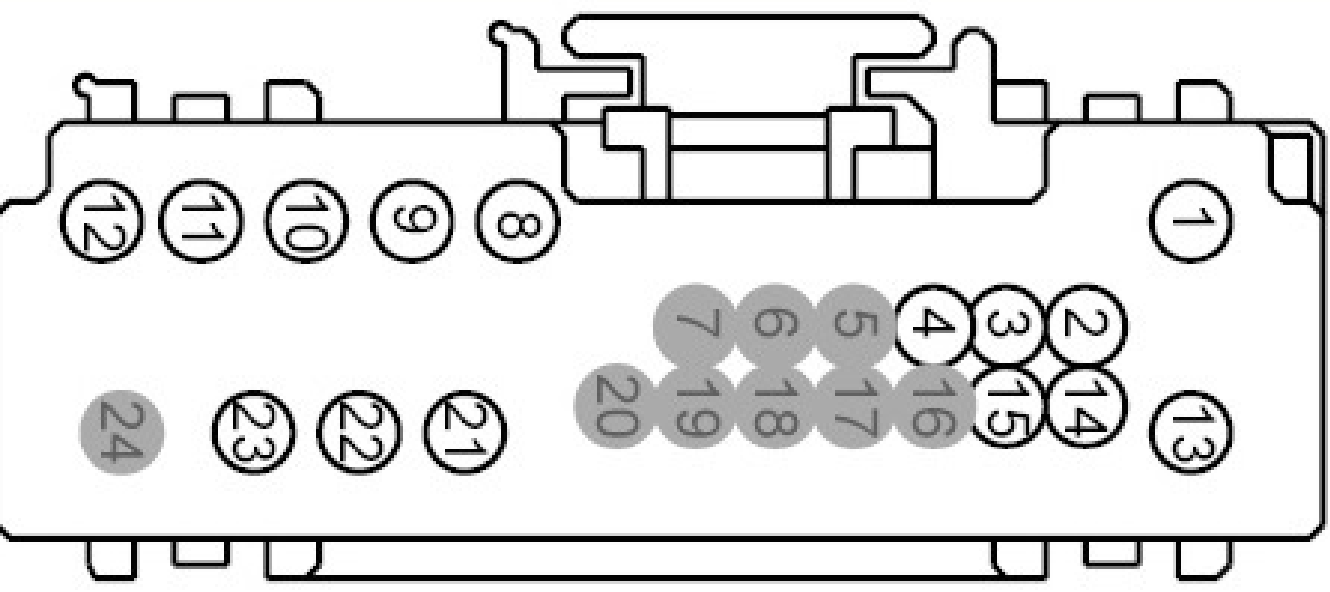


Pin	Circuit	Gauge	Circuit Function	Qualifier
1	958 (OG-LG)	16	Voltage supplied at all times (overload protected)	
2	137 (YE-BK)	20	Accessory delay relay output	
3	19 (LB-RD)	22	Instrument illumination feed	
4	57 (BK)	22	Ground	
5	*	*	not used	
6	*	*	not used	
7	*	*	not used	
8	804 (OG-LG)	20	Tweeter, left front +	
9	801 (TN-YE)	20	Speaker, left rear +	
10	802 (OG-RD)	20	Speaker, right rear +	
11	805 (WH-LG)	20	Tweeter, right front +	
12	811 (DG-OG)	20	Tweeter, right front -	
13	694 (BK-LG)	16	Ground	
14	679 (GY-BK)	20	Vehicle speed signal (+)	
15	1788 (BN-PK)	20	Start signal	
16	*	*	not used	
17	*	*	not used	
18	*	*	not used	
19	*	*	not used	
20	*	*	not used	
21	813 (LB-WH)	20	Tweeter, left front -	
22	800 (GY-LB)	20	Speaker, left rear -	
23	803 (BN-PK)	20	Speaker, right rear -	
24	*	*	not used	

Connector: **C240B**

Description:  
AUDIO UNIT

Harness:  
19B107

Base Part #:  
18808

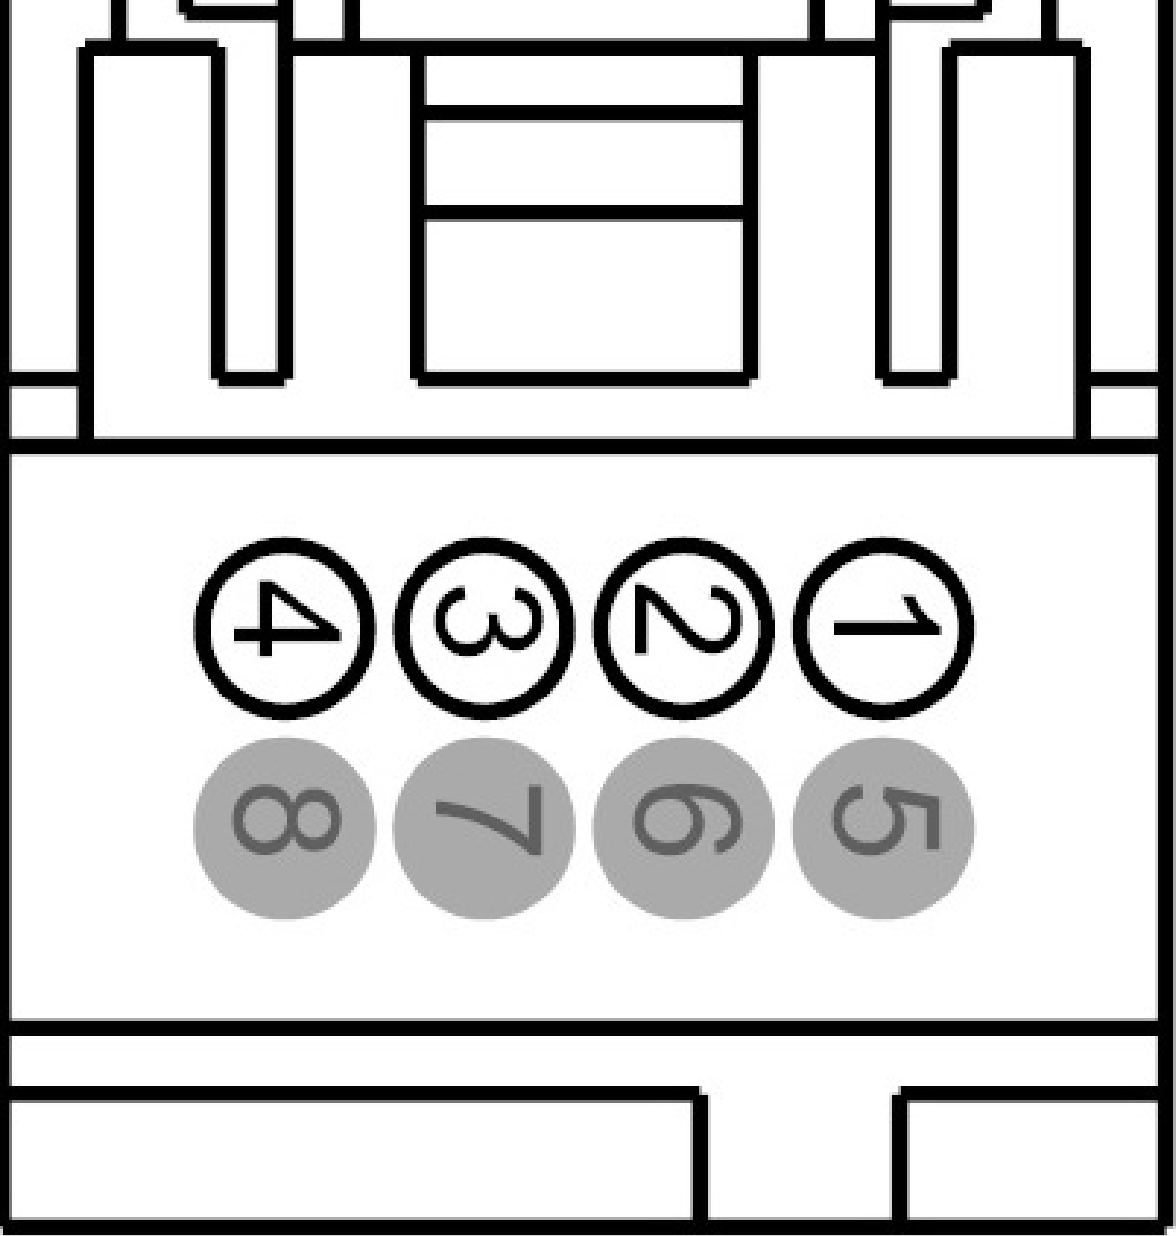


Pin	Circuit	Gauge	Circuit Function	Qualification
1	169 (LG-BK)	20	Audio +	
2	172 (LB-RD)	20	Audio -	
3	1205 (BK)	20	Shield	
4	174 (GY-BK)	20	Auxiliary audio enable	
5	*	*	not used	
6	*	*	not used	
7	*	*	not used	
8	*	*	not used	

Connector: C513

Description:  
TWEETER, LEFT FRONT

Harness:  
14631

Base Part #:  
19A067

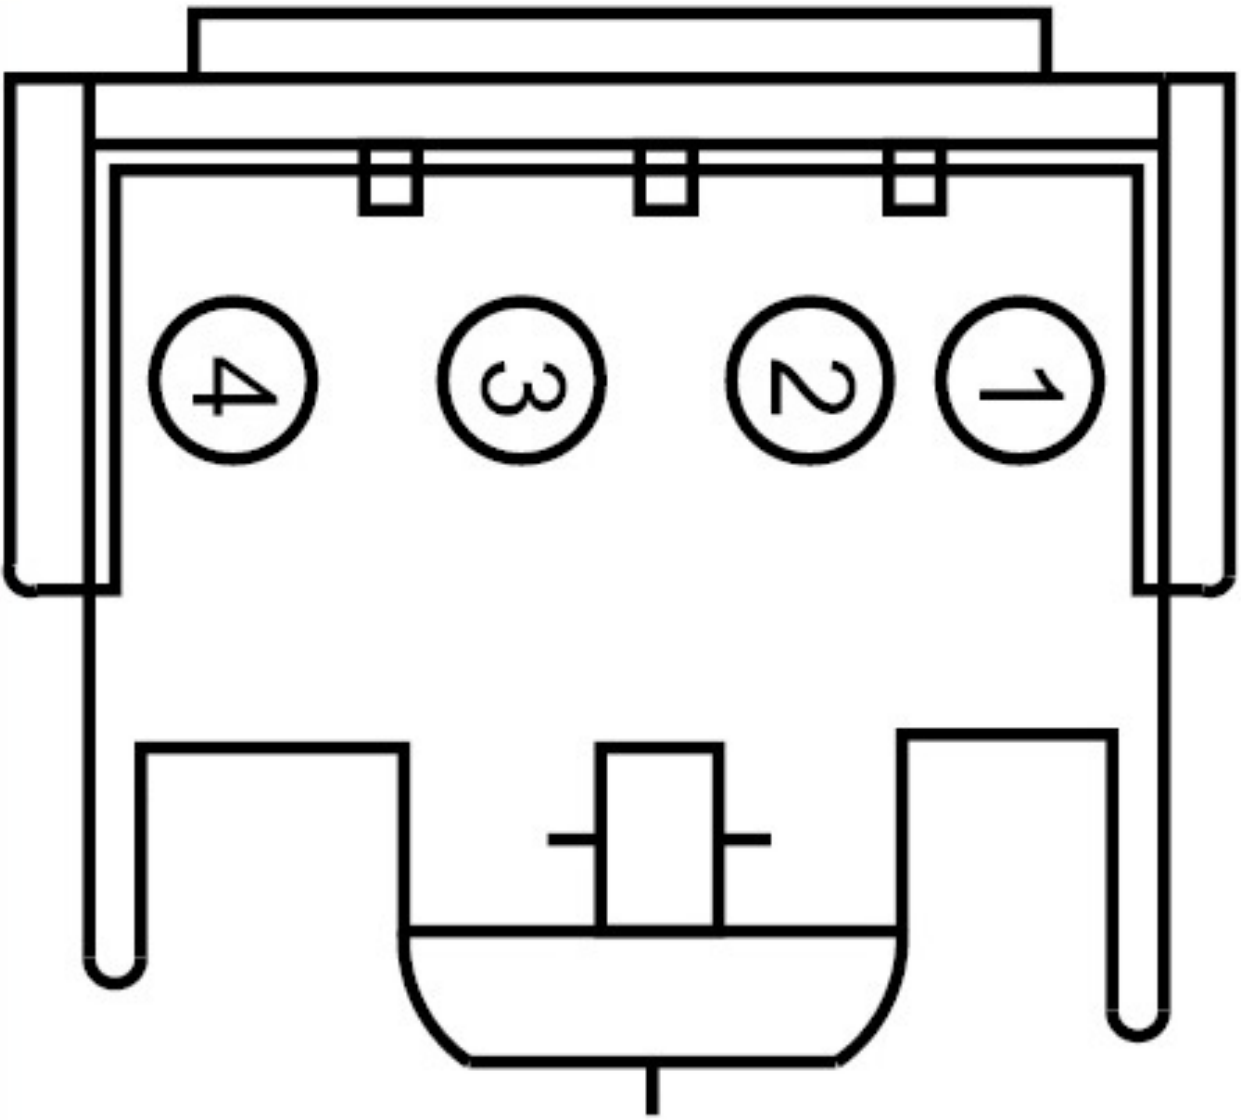

Pin	Circuit	Gauge	Circuit Function	Qualifier
1	804 (OG-LG)	20	Tweeter, left front +	
2	813 (LB-WH)	20	Tweeter, left front -	
3	176 (PK-LG)	20	Front left +	
4	179 (OG-RD)	20	Front left -	




**Connector:** C613

**Description:** TWEETER, RIGHT FRONT

**Harness:** 14630

**Base Part #:** 19A067

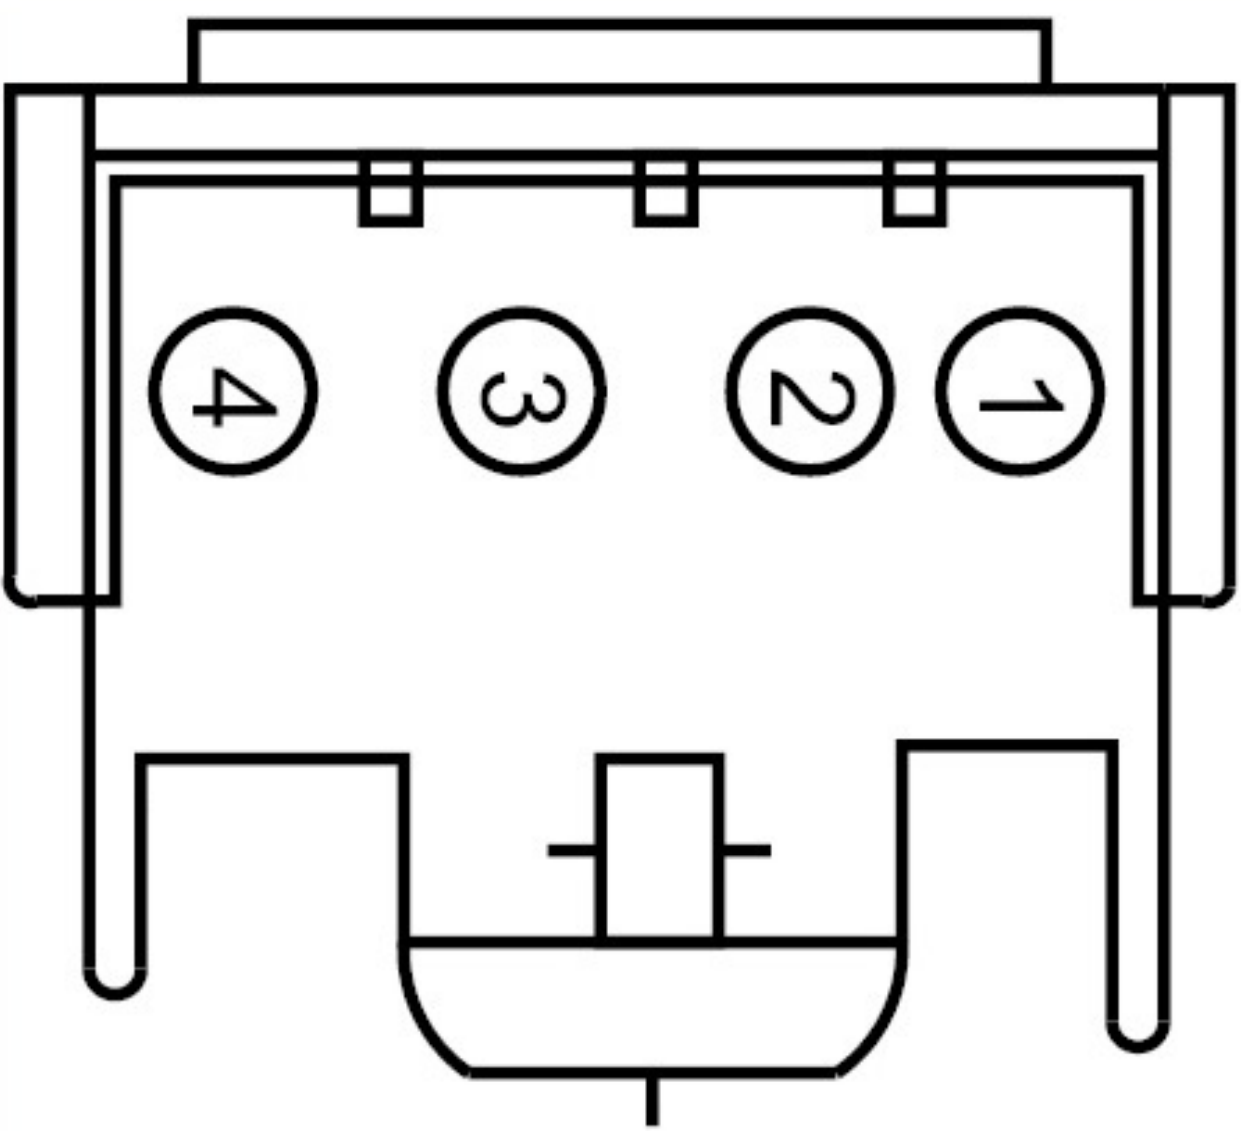

Pin	Circuit	Gauge	Circuit Function	Qualifier
1	805 (WH-LG)	20	Tweeter, right front +	
2	811 (DG-OG)	20	Tweeter, right front -	
3	187 (DB-OG)	20	Front right +	
4	189 (TN-LB)	20	Front right -	